

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F




E

D

C

B

A

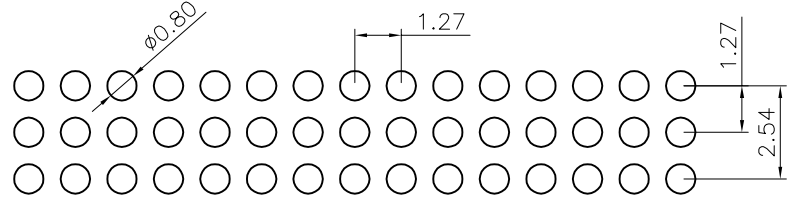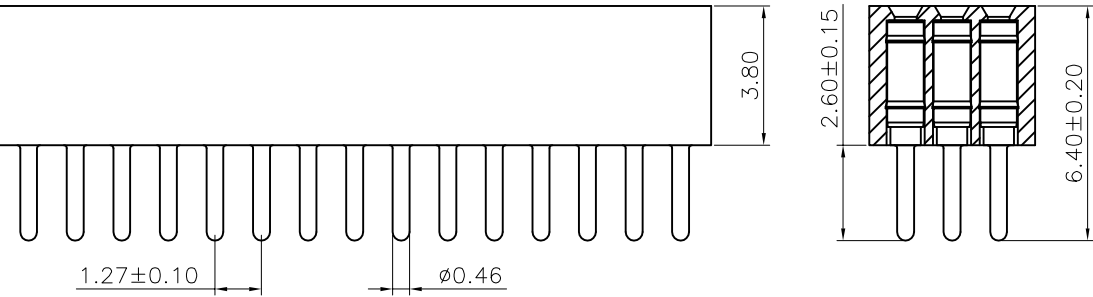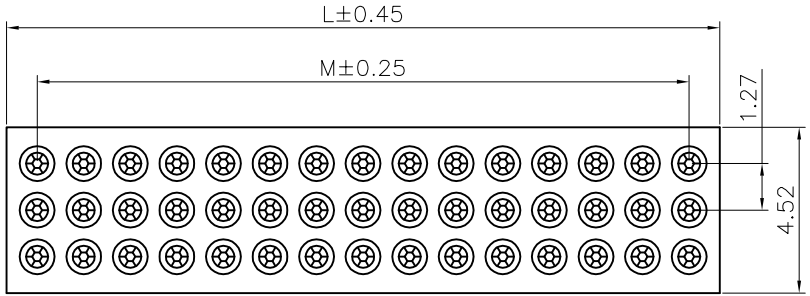

P.C.B LAYOUT

Material:
 Pin(outer sleeve):Brass,machined CuZn38Pb2
 Insulator(black):Black (PA46) UL94V-0

Electrical:
 Current rating:1Amps/contact max.
 Contact resistance:≤4mΩ/contact
 Insulation resistance:≥1000MΩ at V=500V
 Dielectric Withstanding Voltage:1000V AC Min
 Operating voltage:60VAC/DC

Mechanical:
 Operating temperatures:Gold Plated:-55°C to+125°C
 Tin plated:-40°C to+105°C
 Soldering temperature:+260°C,10s max.

All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	M	L
02	1.27	2.74
03	2.54	4.01
04	3.81	5.28
05	5.08	6.55
06	6.35	7.82
07	7.62	9.09
08	8.89	10.36
09	10.16	11.63
10	11.43	12.90
11	12.70	14.17
12	13.97	15.44
13	15.24	16.71
14	16.51	17.98
15	17.78	19.25
16	19.05	20.52
17	20.32	21.79
18	21.59	23.06
19	22.86	24.33
20	24.13	25.60
21	25.40	26.87
22	26.67	28.14
23	27.94	29.41
24	29.21	30.68
25	30.48	31.95
26	31.75	33.22
27	33.02	34.49
28	34.29	35.76
29	35.56	37.03
30	36.83	38.30
31	38.10	39.57
32	39.37	40.84
33	40.64	42.11
34	41.91	43.38
35	43.18	44.65
36	44.45	45.92
37	45.72	47.19
38	46.99	48.46
39	48.26	49.73
40	49.53	51.00

Ordering Information

C KEA301 - XX XX A 002 F X B X
 No. of Pins per Row 02~40 Standard Plating 05=Gold Flash/Tin Color 1=Black Standard Packing C=Tube N=PE Bag

Greenconn
 Website:www.greenconn.com
 E-mail:sales@greenconn.com

3RD.ANG PROJ. PAGE. 1/1	GENERAL TOLERANCE		
	X.*±5.0'	X.±0.50	
	.X.*±5.0'	.X±0.30	
	.XX.*±5.0'	.XX±0.20	
REV. A	UNIT. mm	SCALE. 1:1	
		.XXX.*±5.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	CKEA301-CA002FB
PART NO.	CKEA301-XXXX A002FBX

TITLE.
 Pitch 1.27mm SIP
 Socket Three Row

M4 1 2 3 4 5 6 7 8 9